

Power driver IC for CD player

BA5826FP

BA5826FP is a 4-channel BTL driver for compact disc player.


●Applications

CD player

●Features

- 1) 4 channel BTL driver.
- 2) Reduction of the set space by HSOP28 power package.
- 3) Gain adjustable by external resistor.
- 4) Built-in thermal shutdown circuit.
- 5) Built-in 3.3V regulator.
- 6) Built-in general purpose OP amp.
- 7) Built-in 2.7V reset circuit.
- 8) Reset delay time adjustable by external capacitor.

●Dimension (Unit : mm)

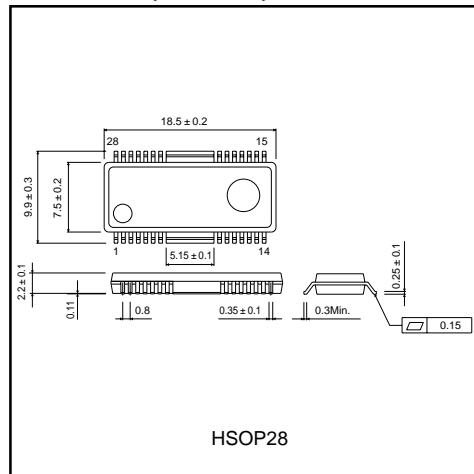

●Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Supply voltage	Vcc	13.5	V
Power dissipation	Pd	1.7 *	W
Operating temperature range	Topr	-35~+85	°C
Storage temperature range	Tstg	-55~+150	°C

*Derating: 13.6mW/°C for operation above Ta=25°C

●Recommended Operating Conditions (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply voltage	Vcc	4.5	-	9	V

Optical disc ICs

●Electrical characteristics

(Unless otherwise noted, Ta=25°C, Vcc=8V, VBIAS=1.65V, RL=8Ω)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Quiescent current	Icc	6.0	10.0	14.0	mA	RL=∞
CH1 maximum output voltage	Vom1	4.35	5.0	—	V	VBIAS=4V
CH1 closed loop voltage gain	Gvc1	6.0	8.0	10.0	dB	
CH2,3,4 maximum output voltage	Vom2	4.3	4.9	—	V	VBIAS=4V
CH2,3,4 closed loop voltage gain	Gvc2	7.0	8.0	9.0	dB	
Regulator output voltage	Vreg	3.13	3.30	3.47	V	IL=100mA
Regulator output load regulation	ΔVRL	-20	0	10	mV	IL=100~200mA
OP amp. offset voltage	VOFOP	-6	—	6	mV	
OP amp. high-level output voltage	VOHOP	7.5	—	—	V	VBIAS=4V
OP amp. low-level output voltage	VOLOP	—	—	0.3	V	VBIAS=4V

Optical disc ICs

● Application Circuit

